

Description




The EST-EXM101 Manual call point has excellent explosion-proof performance. It is suitable for hazardous locations which include explosive gas environment.

After people confirm fire occurs and press the button of EST-EXM101, it will send the alarm signal to fire alarm panel.

The EST- EXM101 has position indication and alarm indicator. It's very simple and easy to use. The AW-EXM101 can be compatible with most fire alarm control panels.

Features

- With a reset key
- Alarm indicator
- Excellent explosion-proof performance

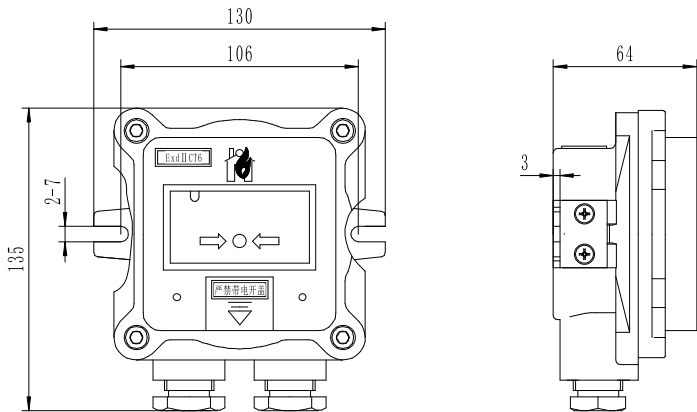

Technical Specification

Model	EST-EXM101	
Voltage	DC24V	
Alarm Current	10mA?	
Indicator Standby:	Green	Alarm: Red
Alarm Out	Normal Open	
Ex-Atex Protection	Level Exd II CT6	
Mating Host	EST-CFP2166 fire alarm control panel	
Outlet Thread	G20	
Environmental	Temperature range: -20 to 50°C	
Humidity:	5 to 95% RH, non-condensing	
Materials and colors	Cast Iron ABS, RED	
Size	135mm* 130mm* 64mm	
Weight	About 1kg	